

Specifications

Model	SX-135 XC	
Measurements	Metric	US
Working height maximum*	43.15 m	141 ft
Platform height maximum	41.15 m	135 ft
Horizontal reach maximum	27.43 m	90 ft
Below ground reach	6.00 m	19 ft 8 in
A Platform length	0.91 m	3 ft
B Platform width	2.44 m	8 ft
C Height - stowed	3.05 m	10 ft
D Length - stowed	19.76 m	64 ft 10 in
Length - transport (jib tucked under)	13.28 m	43 ft 7 in
E Width - axles retracted	2.49 m	8 ft 2 in
Width - axles extended	3.94 m	12 ft 11 in
A Wheelbase - axles retracted	4.11 m	13 ft 6 in
Wheelbase - axles extended	4.11 m	13 ft 6 in
G Ground clearance - center	0.38 m	1 ft 3 in
Productivity		
Lift capacity	300 kg / 454 kg	660 lb / 1,000 lb
Platform rotation	160°	160°
Vertical jib rotation - up/down	70° / 55°	70° / 55°
Turntable rotation	360° continuous	
Turntable tailswing - axle retracted	1.14 m	3 ft 9 in
Turntable tailswing - axle extended	1.70 m	5 ft 7 in
Drive speed - stowed	4.3 km/h	2.7 mph
Drive speed - out of stowed	0.65 km/h	0.4 mph
Gradeability - stowed**	35%	35%
Turning radius - axle retracted: inside	8.03 m	26 ft 4 in
outside	9.96 m	32 ft 8 in
Turning radius - axle extended: inside	2.90 m	9 ft 6 in
outside	6.17 m	20 ft 3 in
Controls	12 V DC proportional	
Tyres	445D50/710HD	

Power

Power source	Deutz TCD2.2 L3 turbo diesel 3-cylinder 74hp (55 kW) Stage V Deutz TD 2011 L04i turbo diesel 4-cylinder 74hp (55kW) Stage IIIA	
Auxiliary power unit	12 V DC	12 V DC
Hydraulic tank capacity	227 L	60 gal
Fuel tank capacity	151 L	40 gal



Weight***

4WD	21,546 kg	47,500 lb
-----	-----------	-----------

Standards Compliance

EU Directives: 2006/42/EC - Machinery
(harmonized standard EN 280:2013+A1:2015);
2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

Range Of Motion SX-135 XC

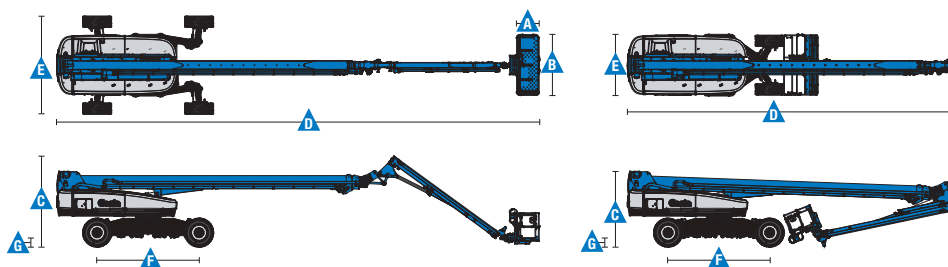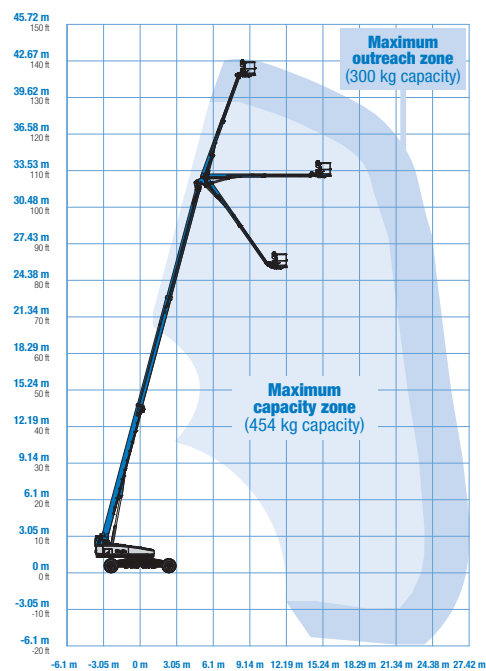

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.

Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
Measurements SX-135 XC 43.15 m (141 ft) working height 27.43 m (90 ft) horizontal reach 300 kg (660 lb) unrestricted and 454 kg (1,000 lb) restricted lift capacity	Platform Options - Steel 1.83 m (6 ft) dual-entry platform with side swing gate - Steel 2.44 (8 ft) tri-entry platform with side swing gate (standard) Jib 5.48 m (18 ft) to 9.14 m (30 ft) Telescoping Jib-Extend™ Engine Options - Deutz TCD2.2 L3 turbo diesel 3-cylinder 74hp (55 kW) Stage V - Deutz TD 2011 L04i turbo diesel 4-cylinder 74hp (55kW) Stage IIIA Drive/Steer 4 x 4 (standard) 4 wheel steer (standard) Axles - Mini X-chassis™ extendable axles (standard) Tyres - Rough terrain foam-filled (standard)	Productivity Options - Half-mesh platform inserts - Platform auxiliary top rail - Hostile environment package⁽¹⁾ - Dual axis joystick steering - Work lights package (2 platform mounted work lights)⁽¹⁾ - Biodegradable Hydraulic Oil - Airline to Platform⁽¹⁾ - Aircraft Protection Kit^(1,4): platform foam padding and padded disable system - Chassis tilt lift function cut-out - Lockable platform control box cover - Track & Trace⁽²⁾ (GPS unit providing machine location & operating information) - Operator Protective Structure⁽³⁾ - Genie® Tech Pro™ Link Hand-held Diagnostics Device Power Options - AC generator packages (110V/60Hz, 110V/50Hz, 240V/50Hz) 3000W, hydraulically driven - Cold Weather Package⁽¹⁾ - Diesel scrubber/spark arrestor muffler (catalytic muffler), Stage IIIA engine only - Intake air pre-cleaner



⁽¹⁾ Factory-fit option only

⁽²⁾ Includes a first 2 years subscription

⁽³⁾ Aftermarket only

⁽⁴⁾ Requires 1.83 m (6 ft) platform, not available with any other platform, nor platform option